

Armadillo LED - Evolution In Lighting

Tel. 0845 060 4000 Intl. +44 1371 87 69 69
Fax. 0845 060 4001 Intl. +44 1371 87 54 37

Bigods Hall | Bigods Lane | Great Dunmow | Essex | CM6 3BE | England

email: sales@armark.com web: www.armadilloLED.com online: @armadilloled

Smart Brix™ LED Bulkhead Standard or Emergency



© 2014 Armadillo LED - Evolution In Lighting (part of Armadillo Marketing Limited est. 1996)
All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.
No liability will be accepted by the publisher for any consequence of its use.



Smart Brix™ LED Bulkhead



Specifications

- Rated Lifetime 50,000 Hours
- 100lm/W
- Manual or self testing options
- Emergency option with easy stick emergency stickers
- Built in sensor option
- IP65 Rated
- IK10 Rated
- Option to switch between 600lm or 300lm

Accessories



SBR-U



SBR-D




SBR-L



SBR-R


289 x 99 mm PVC

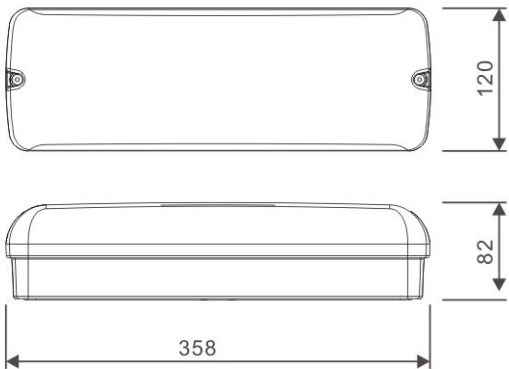

Code	Input Voltage	LED Type	Input Power	Optional Lumen	Sensor	Emergency Manual Testing	Emergency Self Testing	Mode of Operation	Duration	Battery	NW (Kg)
LBH-600	220-240V~50/60Hz	SMD2835	5.7W	600LM / 300LM	-	-	-	-	-	-	0.51
LBH-600S	220-240V~50/60Hz	SMD2835	6.8W	600LM / 300LM	Yes	-	-	-	-	-	0.58
LBH-600E01	220-240V~50/60Hz	SMD2835	7.3W	600LM / 300LM	-	Yes	-	Maintained	1h	Ni-CD 2/3AA450mAhHT 7.2v	0.71
LBH-600E03	220-240V~50/60Hz	SMD2835	7.3W	600LM / 300LM	-	Yes	-	Maintained	3h	Ni-CD AA900mAhHT 7.2v	0.85
LBH-600E01-ST	220-240V~50/60Hz	SMD2835	7.3W	600LM / 300LM	-	-	Yes	Maintained	1h	Ni-CD 2/3AA450mAhHT 7.2v	0.71
LBH-600E03-ST	220-240V~50/60Hz	SMD2835	7.3W	600LM / 300LM	-	-	Yes	Maintained	3h	Ni-CD AA900mAhHT 7.2v	0.85
LBH-600E01S	220-240V~50/60Hz	SMD2835	8.5W	600LM / 300LM	Yes	Yes	-	Maintained	1h	Ni-CD 2/3AA450mAhHT 7.2v	0.78
LBH-600E03S	220-240V~50/60Hz	SMD2835	8.5W	600LM / 300LM	Yes	Yes	-	Maintained	3h	Ni-CD AA900mAhHT 7.2v	0.92
LBH-600E01S-ST	220-240V~50/60Hz	SMD2835	8.5W	600LM / 300LM	Yes	-	Yes	Maintained	1h	Ni-CD 2/3AA450mAhHT 7.2v	0.78
LBH-600E03S-ST	220-240V~50/60Hz	SMD2835	8.5W	600LM / 300LM	Yes	-	Yes	Maintained	3h	Ni-CD AA900mAhHT 7.2v	0.92

Smart Brix™ LED Bulkhead


Description

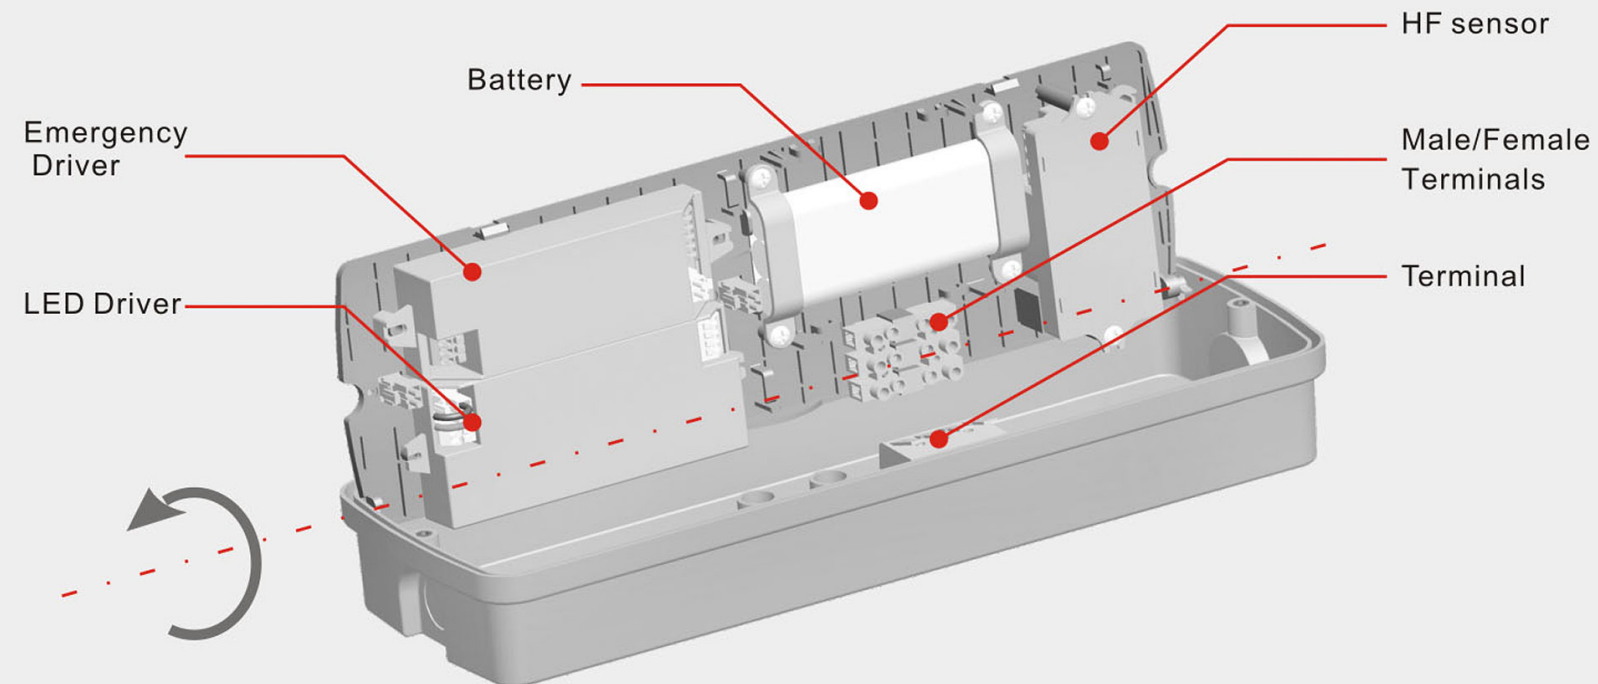


Exit Sign On Request



Replaceable Lighting Engine

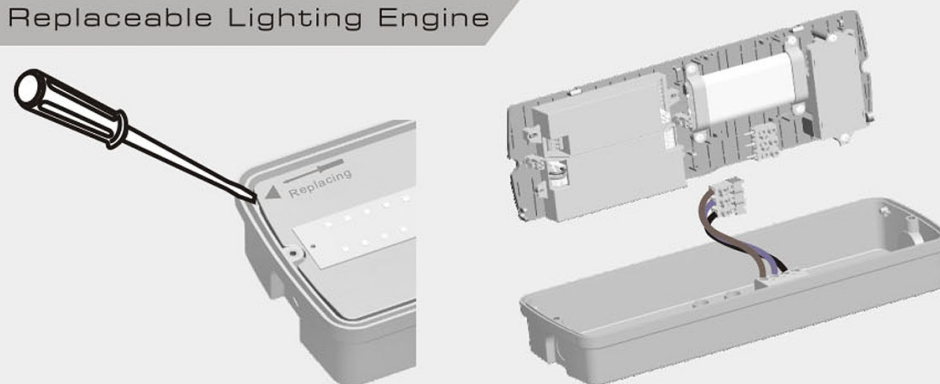


Optional Output Brightness

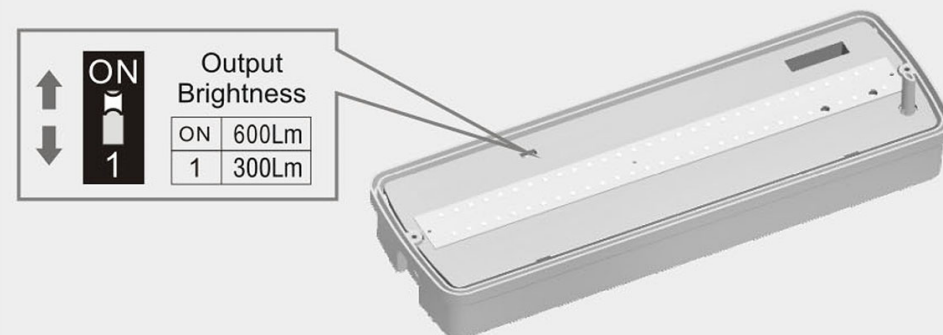


A

Normal light-control function
Sensor with On/Low light(10-30%)/Off ,three-step dimmable.

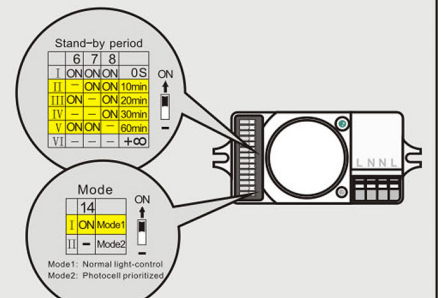



B

Normal light-control function
Sensor with On/Off ,two-step dimmable.

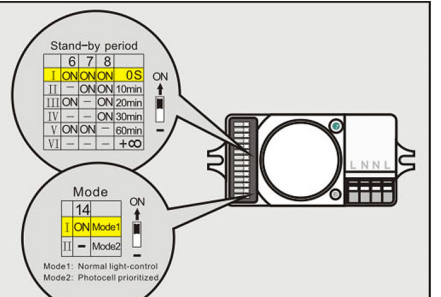

C

Normal light-control function
Sensor with On/Low light (10-30%)

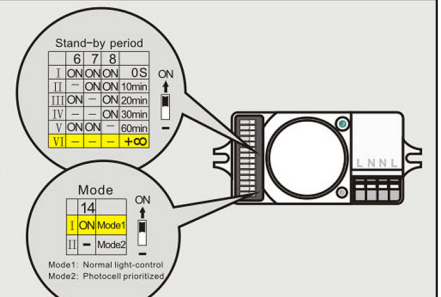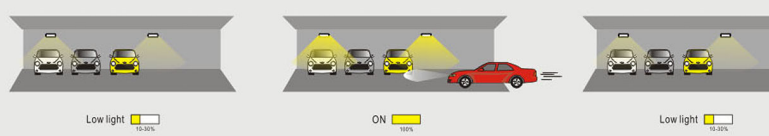

D

Photocell prioritized function
Sensor with On/Low light (10-30%)

