Armadillo LED - Evolution In Lighting

Tel. 0845 060 4000 Intl. +44 1371 87 69 69
Fax. 0845 060 4001 Intl. +44 1371 87 54 37

Bigods Hall | Bigods Lane | Great Dunmow | Essex | CM6 3BE | England

email: sales@armark.com web: www.armadilloLED.com online: @armadilloled

Armark IP44 LED Linear Indoor Lighting

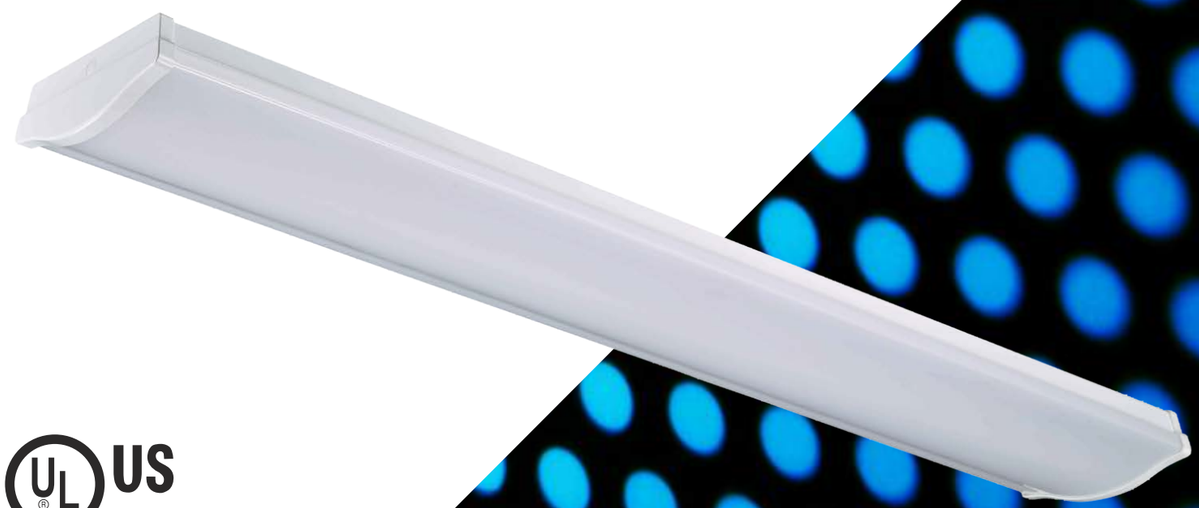

© 2019 Armadillo LED - Evolution In Lighting (part of Armadillo Marketing Limited est. 1996)
All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract,is believed to be accurate and reliable and may be changed without notice.
No liability will be accepted by the publisher for any consequence of its use.

Armark IP44 LED Lighting

The Armark IP44 LED is a lightweight, durable indoor lighting solution. A low profile polycarbonate diffuser distributes light uniformly across the room. Long life LED strips, coupled with a high-efficiency Osram driver, provide superior quality of illumination for extended service life. Rated to deliver high performance output for minimum 50,000 hours. Supplied with 5 year Warranty as standard.

Armark IP44 LED 4ft

Colour Temperature	4000K (Optional: 3000k, 5000K)
Colour Rendering Index	>80 CRI
Wattage	40W
Lifetime	>50,000 Hours
IP Rating	IP44
IK Rating	IK05
Voltage	AC120-277V 50/60Hz

Operating Temp	-30°C ~ +50°C
Driver	>Osram
Power Factor	>0.95
Driver Current	560mA
Lumen Output	4160
Warranty	5 Years
Efficiency	>100lm/w

Armark IP44 LED 5ft

Colour Temperature	4000K (Optional: 3000k, 5000K)
Colour Rendering Index	>80 CRI
Wattage	50W
Lifetime	>50,000 Hours
IP Rating	IP44
IK Rating	IK05
Voltage	AC120-277V 50/60Hz

Operating Temp	-30°C ~ +50°C
Driver	>Osram
Power Factor	>0.95
Driver Current	700mA
Lumen Output	5200
Warranty	5 Years
Efficiency	>100lm/w

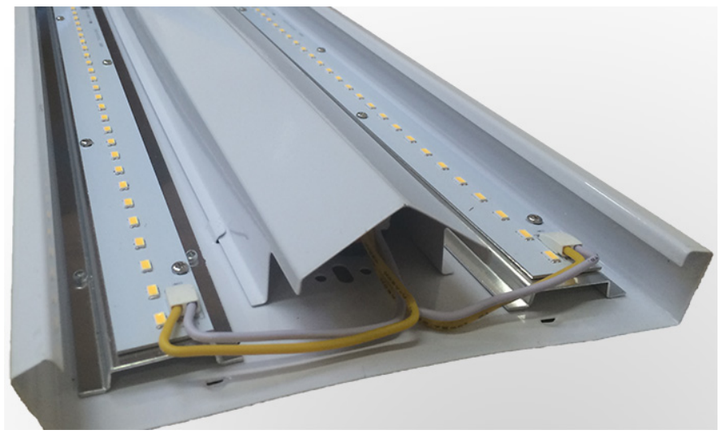

Mounting Hole Distance (unit: mm)

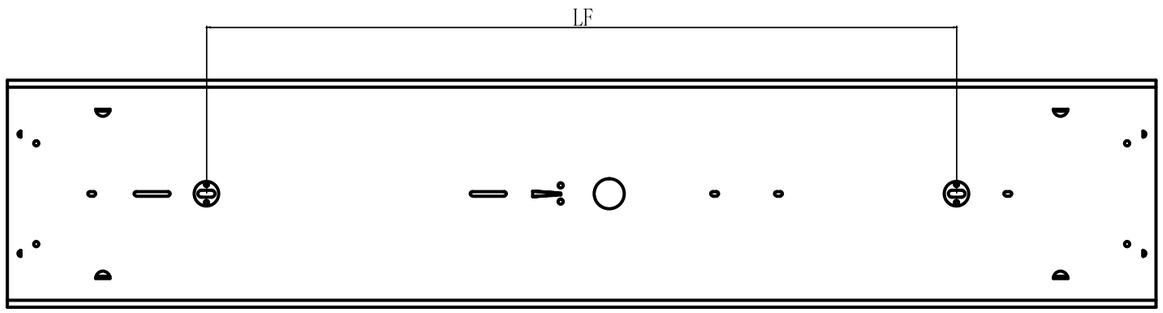
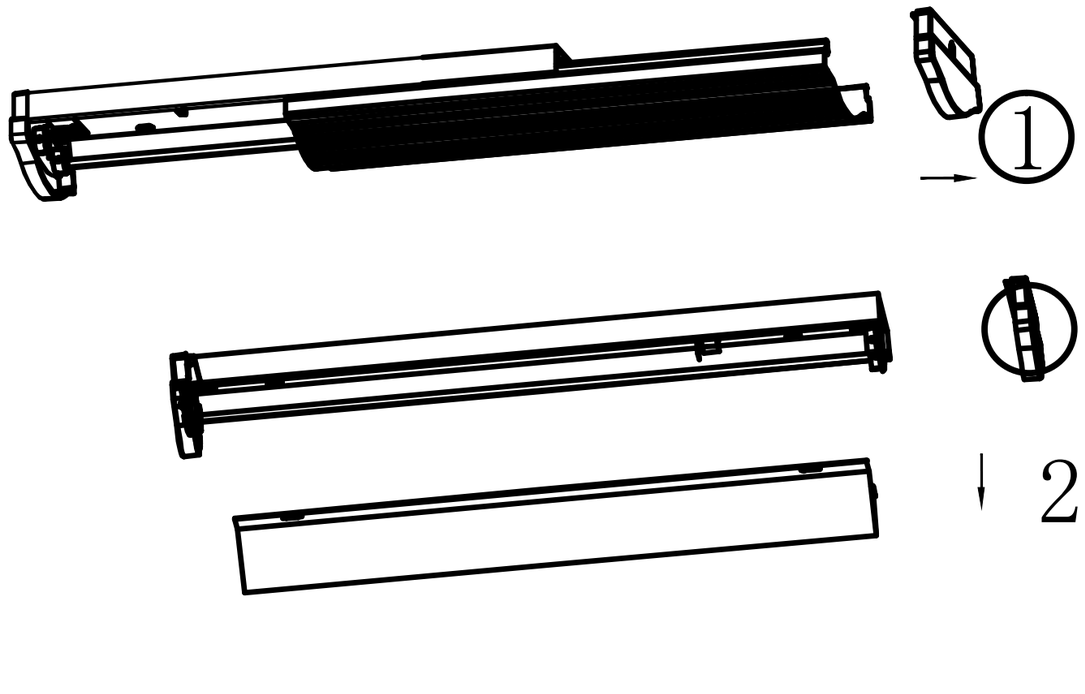
Product Disassembly