

LOW PROFILE WALL PACK



Wall Pack LED Lighting

PRODUCT SPECIFICATION SHEET




DESCRIPTION:

Slim and durable design ensures a discreet integration without compromising on performance. Suited to various applications such as building exteriors, outdoor corridors, garages, paths, tunnels and all other outdoor environments. Our low profile Wall Pack provides energy efficient lighting, with the provision of a delivered low glare light source.

KEY FEATURES:


- Tough 6061 aluminum housing
- Contemporary, architectural design and elegant appearance
- Wall mounting, easy installation with removable back plate
- 6kV surge protection*
- IP66 & IK10 rated
- TYPE IV provides an excellent effect, managing glare while provides high level of visibility
- 15W, 25W, 35W, 45W, 60W are available.
- Efficiency up to 140lm/W.
- Optional Photocell
- Up to 130,000 hours lifetime
- 6 Years Warranty

DRAWINGS:

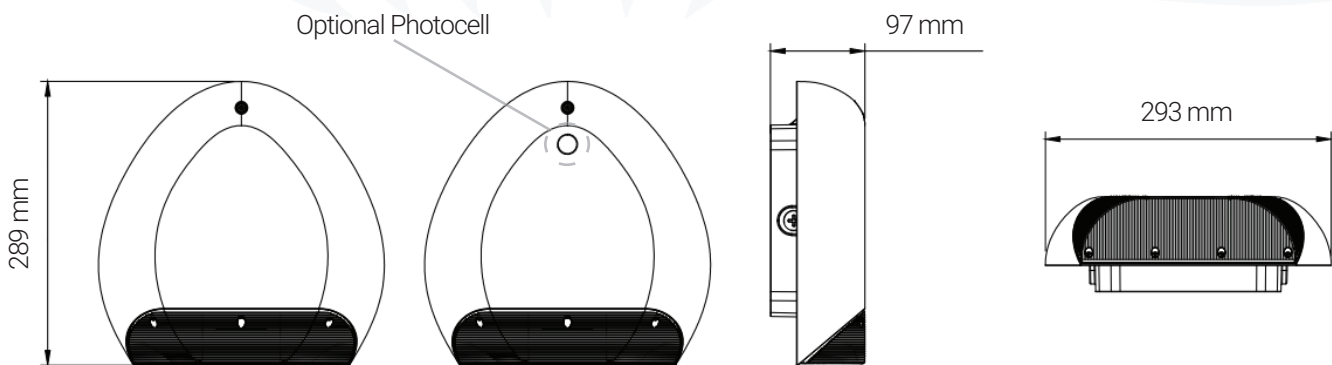


PHOTOMETRIC DIAGRAM: MOUNTING: ACCESSORIES:

Beam Angle



Wall Mounting



Photocell Control



100-240 VAC Input

LOW PROFILE WALL PACK

Wall Pack LED Lighting

PRODUCT SPECIFICATION SHEET



ELECTRICAL INFORMATION:

MODEL	ARM-SWP015	ARM-SWP025	ARM-SWP035	ARM-SWP045	ARM-SWP055
POWER	15 W	25 W	35 W	45 W	55 W
INPUT VOLTAGE	220-240 VAC , 50 / 60 Hz				
POWER FACTOR	>0.92				
SURGE PROTECTION*	2kV line-line 4kV line-earth	4kV line-line 6kV line-earth			
DRIVER TYPE	Constant Current (CC)				
CONTROL	Optional Photocell Control				

OPTICS:

LED TYPE	LED 2835				
LUMINOUS FLUX	2100lm	3500lm	4900lm	6300lm	7700lm
EFFICACY (4000K Ra80)	140lm/W				
COLOUR TEMPERATURE	4000K (3000K,5000K optional)				
CRI	Ra80 (Ra90 optional)				

DIMENSIONS AND MATERIALS:

PRODUCT DIMENSIONS	293x289x97mm
NET WEIGHT	2.3±0.3KG
PACKAGING SIZE	360x360x150mm
GROSS WEIGHT	2.7±0.3KG
MATERIALS	6061 Aluminum Housing, Polycarbonate Lens
FINISH	Powder Coated
IK RATING	IK10
IP RATING	IP66
OPERATING TEMPERATURE	-30°C to + 50°C
LIFE TIME OF LED @Ta=25°C	54000hrs-L90, 82000hrs-L80, 130000hrs-L70
WARRANTY	6 Years