




QuadraLED Magnalock™

The QuadraLED Magnalock™ luminaire is designed for mounting in extra demanding areas. Equipped with a security glass cover, tightly sealed by multiple high power permanent neodymium magnets to ensure IP65 protection, and easy maintenance. Standard fit into a traditional 600mm x 600mm grid ceiling, surface mounting and various other fitting sizes available. High performance LED modules provide excellent light levels with high colour render of CRI >80 to reveal the true colours of surroundings. Various colour temperatures are available from 3000k up to 5000k. DALI as standard, other options include 1-10v or DALI dimming, integrated emergency power packs. Bespoke sizes available

FEATURES:




Multiple modules for easy replacement and upgrades. High CRI >80 to reveal the true colours of surroundings. Excellent 135lm/w with full control options of DALI, 1-10v as specified or required.



Toughened security glass tightly sealed to IP65, safety cables inside for easy maintenance and inspection.



Easy to use unique tool to remove the security glass safely. To put back, simply place the glass cover back on and watch it lock securely into place.

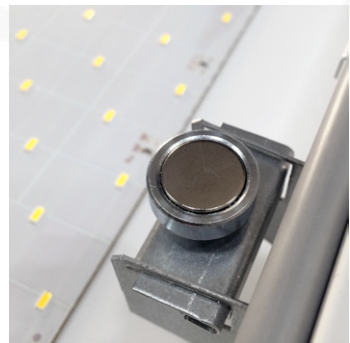

'Magnalock™' Technology - Multiple high power permanent neodymium magnets lock the glass cover in place and ensure a tight seal for IP65 ingress protection against water and dust.

QuadraLED Magnalock™ Recessed/Surface Mount Glass 598mm x 598mm

Product code:	
Q	Quadra product line
M	Magnalock series
R or S	Recessed or Surface Mount
S	Square 598x598 (2x2)
IP65	Ingress Protection
40W (50W,65W)	Rated Power
4K (3K, 5K)	Colour Temperature
DALI	Control system
E3	Integrated Emergency (optional)



Colour Temperature:
4000K (Optional: 3000k, 5000K)
 Colour Rendering Index: **CRI >80**
 Wattage: **40W, 50W or 65W**
 Lifetime: **70,000 Hours**
 IP Rating: **IP65**

Voltage: **AC100-277V 50/60Hz**
 Warranty: **5 Years**
 Efficiency: **>135lm/w**
 Optional Emergency: **Yes**
 Optional Dimming: **1-10V, DALI**
 Housing Colour: **RAL9003 / Signal White** (Optional: RAL9010 / Pure White)

PRODUCT CODE:	PRODUCT DETAILS:
QSRS-IP65-2X2-40W-4K-DALI LUL	MAGNALOCK RECESSED SQUARE LED LUMINAIRE 2X2 40W 4000K DALI 1A FUSE
QSRS-IP65-2X2-50W-4K-DALI LUL	MAGNALOCK RECESSED SQUARE LED LUMINAIRE 2X2 50W 4000K DALI 1A FUSE
QSRS-IP65-2X2-65W-4K-DALI LUL	MAGNALOCK RECESSED SQUARE LED LUMINAIRE 2X2 65W 4000K DALI 1A FUSE

QSSS-IP65-2X2-40W-4K-DALI LUL	MAGNALOCK SURFACE SQUARE LED LUMINAIRE 2X2 40W 4000K DALI 1A FUSE
QSSS-IP65-2X2-50W-4K-DALI LUL	MAGNALOCK SURFACE SQUARE LED LUMINAIRE 2X2 50W 4000K DALI 1A FUSE
QSSS-IP65-2X2-65W-4K-DALI LUL	MAGNALOCK SURFACE SQUARE LED LUMINAIRE 2X2 65W 4000K DALI 1A FUSE

QuadraLED Magnalock™ Recessed/Surface Mount Glass 298mm x 1198mm

Product code:	
Q	Quadra product line
M	Magnalock series
R or S	Recessed or Surface Mount
L	Linear 298x1198
IP65	Ingress Protection
40W (50W,65W)	Rated Power
4K (3K, 5K)	Colour Temperature
DALI	Control system
E3	Integrated Emergency (optional)



Colour Temperature:
4000K (Optional: 3000k, 5000K)
 Colour Rendering Index: **CRI >80**
 Wattage: **40W, 50W or 65W**
 Lifetime: **70,000 Hours**
 IP Rating: **IP65**

Voltage: **AC100-277V 50/60Hz**
 Warranty: **5 Years**
 Efficiency: **>135lm/w**
 Optional Emergency: **Yes**
 Optional Dimming: **1-10V, DALI**
 Housing Colour: **RAL9003 / Signal White** (Optional: RAL9010 / Pure White)

PRODUCT CODE:	PRODUCT DETAILS:
QMRL-IP65-4X1-40W-4K-DALI LUL	MAGNALOCK RECESSED LINEAR LED LUMINAIRE 4X1 40W 4000K DALI 1A FUSE
QMRL-IP65-4X1-50W-4K-DALI LUL	MAGNALOCK RECESSED LINEAR LED LUMINAIRE 4X1 65W 4000K DALI 1A FUSE
QMRL-IP65-4X1-65W-4K-DALI LUL	MAGNALOCK RECESSED LINEAR LED LUMINAIRE 4X1 65W 4000K DALI 1A FUSE

QMSL-IP65-4X1-40W-4K-DALI	MAGNALOCK SURFACE LINEAR LED LUMINAIRE 4X1 40W 4000K DALI 1A FUSE
QMSL-IP65-4X1-50W-4K-DALI	MAGNALOCK SURFACE LINEAR LED LUMINAIRE 4X1 50W 4000K DALI 1A FUSE
QMSL-IP65-4X1-65W-4K-DALI	MAGNALOCK SURFACE LINEAR LED LUMINAIRE 4X1 65W 4000K DALI 1A FUSE